



DB-100

FEATURES :


- ✓ Failed Safe Operation (Energized To Lock)
- ✓ Low Surface Temperature
- ✓ Low Power Consumption
- ✓ Door Status Monitoring Output
- ✓ Auto Re-Lock Timer 0, 3, 6, 9 Sec
- ✓ Durable & Silence Operation
- ✓ Carrulous Line Finish Aluminum Surface
- ✓ Full Range Of Optional Brackets

SPECIFICATIONS :

- 1 Voltage Input : 12 VDC
- 2 Current Draw : 100mA (Standby) ; 900mA (Start)
- 3 Locking Force : Up to 800kg
- 4 Sensor Monitor Rating : 0.5Amp @ 28Vdc Max
- 5 Gap Sensing Distance : 8mm
- 6 Material: Solid S/Steel Φ 14mm bolt
- 7 Operating Temperature : 0~55 °C (14~131°F)
- 8 Operating Humidity : 0~90% (non condensing)
- 9 Weight : 0.7 kg
- 10 Dimensions : Cover Plate (L) 215 x (W) 41 x (T) 0.8 mm
Face Plate (L) 205 x (W) 35 x (T) 3 mm
Strike Plate (L) 87 x (W) 24 x (T) 5.7 mm

EBELCO Electricified Drop Bolt Series are known with excellent reliability together with its excellent holding force and remarkable standard feature.

The series are compliance to CE and products are manufactured under the highest quality control to achieve the commitment to customer who always satisfied with its durability, quality and reliability.

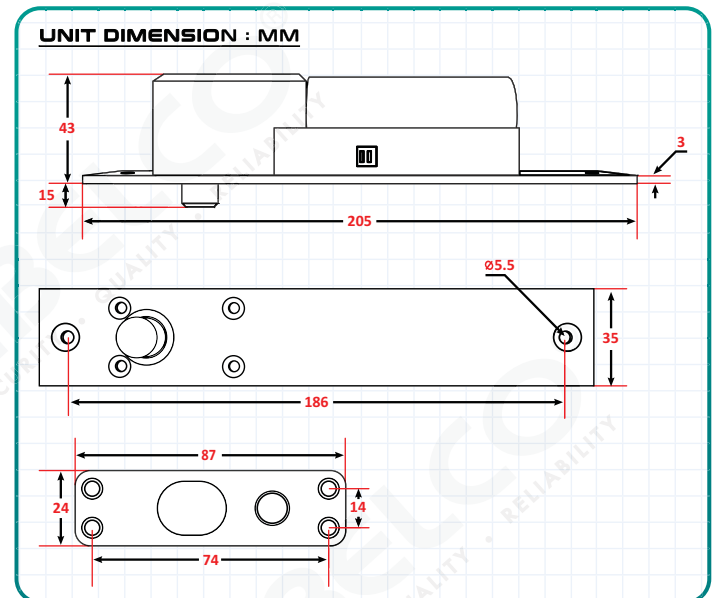

*Disclaimer :

EBELCO reserve the right to go ahead with any modifications of the models or features or price without forewarning. All the information and specifications stated in this document are current at the time of publication.

